


ES4 01 Series

Performance features at 50 Hz


PUMP MODEL	STAGES	P2		l/min m ³ /h	0	5	10	15	20	25
		kW	HP		0	0,3	0,6	0,9	1,2	1,5
ES4 01 10	10	0,37	0,5	mwc	67	63	55	46	33	18
ES4 01 13	13	0,37	0,5		86	78	70	56	42	23
ES4 01 19	19	0,55	0,75		126	118	105	86	60	30
ES4 01 26	26	0,75	1		173	160	141	117	81	39
ES4 01 38	38	1,1	1,5		253	234	208	169	117	52

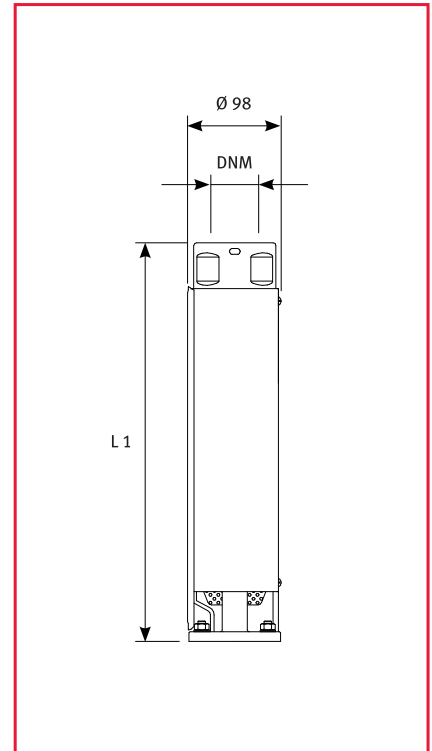

ES4 01..04I Series

Dimensions and weights

ELECTROPUMP MODEL	STAGES	DNM	DIMENSIONS (mm)		PUMP WEIGHT	ELECTROPUMP WEIGHT
			L1	L	kg	kg
ES4 01 10 M 04I	10	RP/NPT 1 1/4"	324	679	3,3	10,6
ES4 01 13 M 04I	13	RP/NPT 1 1/4"	377	732	3,7	11,0
ES4 01 19 M 04I	19	RP/NPT 1 1/4"	481	861	4,7	12,6
ES4 01 26 M 04I	26	RP/NPT 1 1/4"	642	1057	5,8	14,8
ES4 01 38 M 04I	38	RP/NPT 1 1/4"	864	314	8,2	19,1
ES4 01 10 T 04I	10	RP/NPT 1 1/4"	324	658	3,3	10,1
ES4 01 13 T 04I	13	RP/NPT 1 1/4"	377	732	3,7	10,5
ES4 01 19 T 04I	19	RP/NPT 1 1/4"	481	836	4,7	11,0
ES4 01 26 T 04I	26	RP/NPT 1 1/4"	642	1022	5,8	13,7
ES4 01 38 T 04I	38	RP/NPT 1 1/4"	864	1279	8,2	17,2

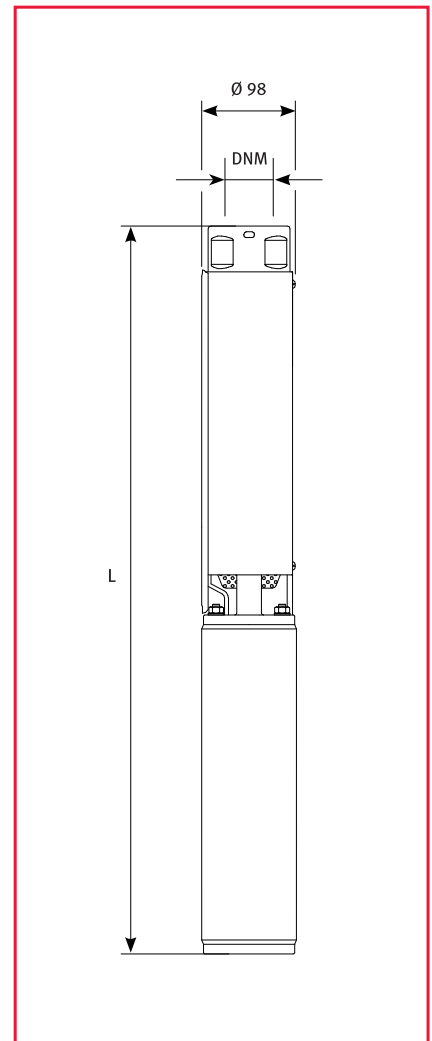

ES4 01..A4I Series

Dimensions and weights

ELECTROPUMP MODEL	STAGES	DNM	DIMENSIONS (mm)		PUMP WEIGHT	ELECTROPUMP WEIGHT
			L1	L	kg	kg
ES4 01 10 M A4I	10	RP/NPT 1 1/4"	324	560	3,3	10,3
ES4 01 13 M A4I	13	RP/NPT 1 1/4"	377	643	3,7	10,7
ES4 01 19 M A4I	19	RP/NPT 1 1/4"	481	767	4,7	12,3
ES4 01 26 M A4I	26	RP/NPT 1 1/4"	642	973	5,8	14,0
ES4 01 38 M A4I	38	RP/NPT 1 1/4"	864	1257	8,2	18,9
ES4 01 10 T A4I	10	RP/NPT 1 1/4"	324	540	3,3	10,1
ES4 01 13 T A4I	13	RP/NPT 1 1/4"	377	613	3,7	10,5
ES4 01 19 T A4I	19	RP/NPT 1 1/4"	481	747	4,7	11,7
ES4 01 26 T A4I	26	RP/NPT 1 1/4"	642	928	5,8	13,4
ES4 01 38 T A4I	38	RP/NPT 1 1/4"	864	1212	8,2	16,4