



ES4 02 Series Performance features at 50 Hz

PUMP MODEL	STAGES	P2		l/min m ³ /h	0	20	25	30	40	50
		kW	HP		0	1,2	1,5	1,8	2,4	3,0
ES4 02 05	5	0,37	0,5	mwc	34	31	29	27	23	16
ES4 02 07	7	0,37	0,5		46	42	39	36	29	22
ES4 02 10	10	0,55	0,75		69	63	60	55	44	29
ES4 02 14	14	0,75	1		92	83	79	74	60	42
ES4 02 20	20	1,1	1,5		139	127	120	111	90	60
ES4 02 28	28	1,5	2		193	176	167	155	125	83
ES4 02 40	40	2,2	3		276	252	239	222	179	118
ES4 02 52	52	3	4		360	328	312	289	233	154

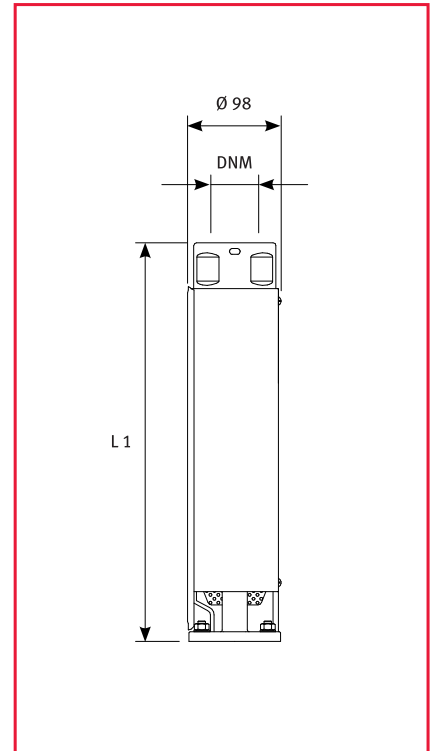

ES4 02..04I Series Dimensions and weights

ELECTROPUMP MODEL	STAGES	DNM	DIMENSIONS (mm)		PUMP WEIGHT	ELECTROPUMP WEIGHT
			L1	L	kg	kg
ES4 02 05 M A4I	5	RP/NPT 1 1/4"	236	591	2,5	9,8
ES4 02 07 M O4I	7	RP/NPT 1 1/4"	271	626	2,8	10,1
ES4 02 10 M O4I	10	RP/NPT 1 1/4"	324	679	3,3	11,2
ES4 02 14 M O4I	14	RP/NPT 1 1/4"	394	774	3,9	12,9
ES4 02 20 M O4I	20	RP/NPT 1 1/4"	499	914	4,9	15,8
ES4 02 28 M O4I	28	RP/NPT 1 1/4"	640	1090	6,2	18,7
ES4 02 40 M O4I	40	RP/NPT 1 1/4"	851	1351	8,1	22,9
ES4 02 05 T O4I	5	RP/NPT 1 1/4"	236	570	2,5	9,3
ES4 02 07 T O4I	7	RP/NPT 1 1/4"	271	605	2,8	9,6
ES4 02 10 T O4I	10	RP/NPT 1 1/4"	324	679	3,3	10,6
ES4 02 14 T O4I	14	RP/NPT 1 1/4"	394	749	3,9	11,8
ES4 02 20 T O4I	20	RP/NPT 1 1/4"	499	879	4,9	13,9
ES4 02 28 T O4I	28	RP/NPT 1 1/4"	640	1055	6,2	17,3
ES4 02 40 T O4I	40	RP/NPT 1 1/4"	851	1301	8,1	20,7
ES4 02 52 T O4I	52	RP/NPT 1 1/4"	1062	1512	10,0	23,3

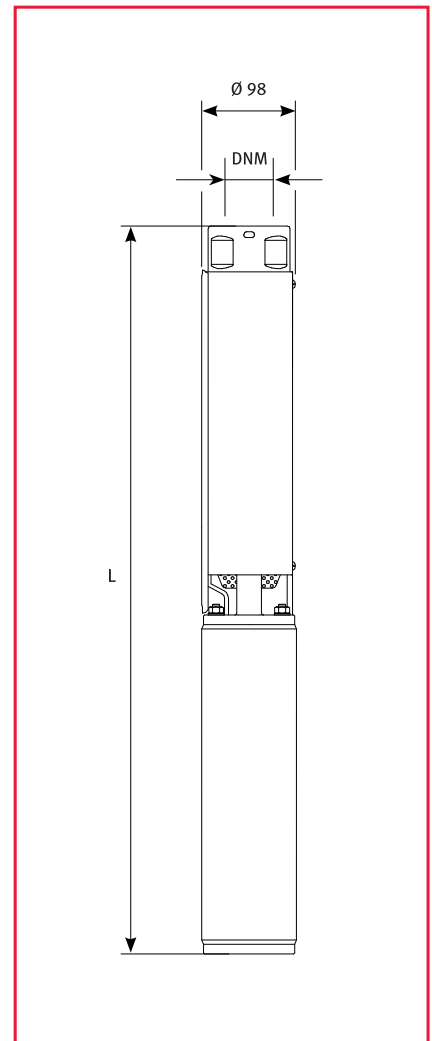

ES4 02..A4I Series Dimensions and weights

ELECTROPUMP MODEL	STAGES	DNM	DIMENSIONS (mm)		PUMP WEIGHT	ELECTROPUMP WEIGHT
			L1	L	kg	kg
ES4 02 05 M A4I	5	RP/NPT 1 1/4"	236	472	2,5	9,5
ES4 02 07 M A4I	7	RP/NPT 1 1/4"	271	507	2,8	9,8
ES4 02 10 M A4I	10	RP/NPT 1 1/4"	324	590	3,3	10,9
ES4 02 14 M A4I	14	RP/NPT 1 1/4"	394	680	3,9	12,1
ES4 02 20 M A4I	20	RP/NPT 1 1/4"	499	830	4,9	15,6
ES4 02 28 M A4I	28	RP/NPT 1 1/4"	640	1033	6,2	18,7
ES4 02 40 M A4I	40	RP/NPT 1 1/4"	851	1264	8,1	22,1
ES4 02 05 T A4I	5	RP/NPT 1 1/4"	236	452	2,5	9,3
ES4 02 07 T A4I	7	RP/NPT 1 1/4"	271	487	2,8	9,6
ES4 02 10 T A4I	10	RP/NPT 1 1/4"	324	560	3,3	10,3
ES4 02 14 T A4I	14	RP/NPT 1 1/4"	394	660	3,9	11,5
ES4 02 20 T A4I	20	RP/NPT 1 1/4"	499	785	4,9	13,1
ES4 02 28 T A4I	28	RP/NPT 1 1/4"	640	988	6,2	18,0
ES4 02 40 T A4I	40	RP/NPT 1 1/4"	851	1244	8,1	20,7
ES4 02 52 T A4I	52	RP/NPT 1 1/4"	1062	1606	10,0	30,4